



CROWN

WB SERIES

Profile Sheet

Counterbalanced
Walkie



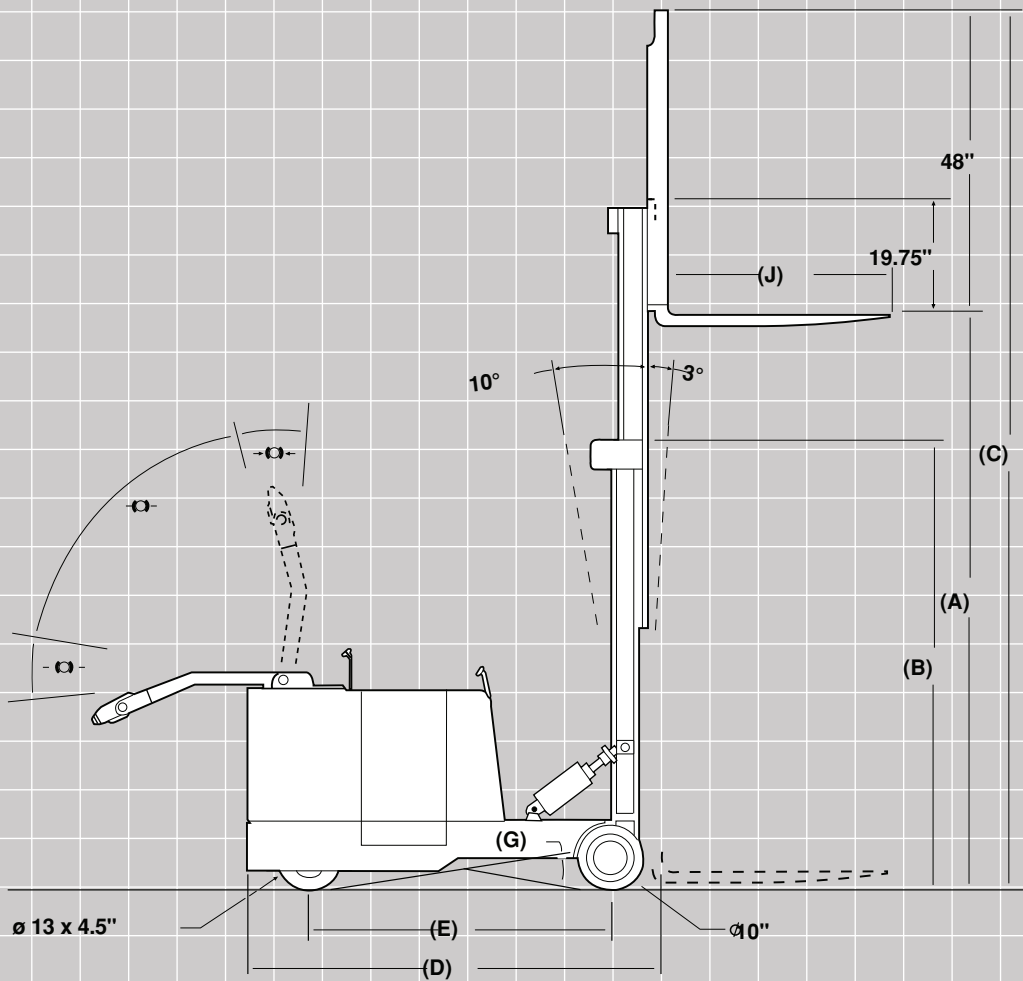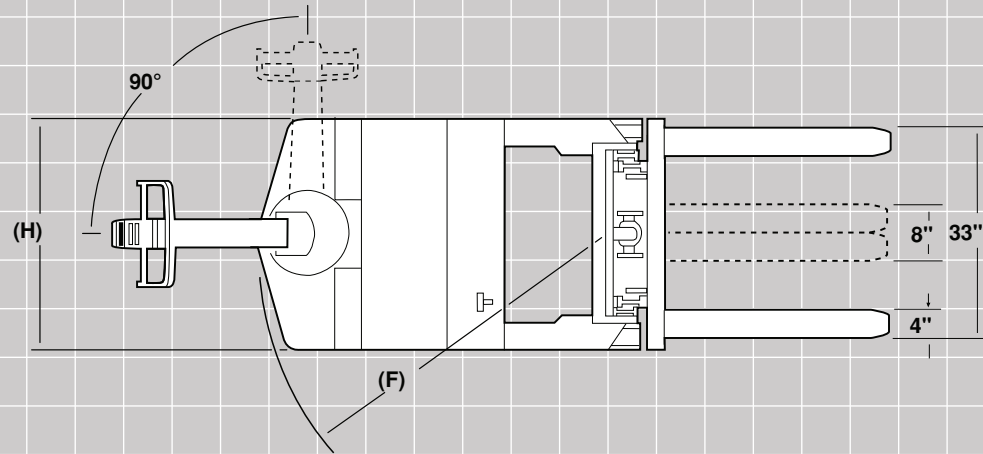

WB Series

Model 20 WB*			20WBTL Limited Free Lift				20WBTF Full Free Lift			
A	Lifting Height	in	106	130	154	178	106	130	154	178
	Capacity at 24" Load Center	lb	2000	2000	2000	1750	2000	2000	2000	1750
	Free Lift	in	12	12	12	12	23	35	47	59
B	Collapsed Height	in	71	83	95	107	71	83	95	107
C	Extended Height**	in	154.5	178.5	202.5	226.5	154.5	178.5	202.5	226.5
	Net Weight Less Battery	lb	3368	3447	3526	3605	3382	3455	3528	3601
D	Head Length	in	65							
E	Wheelbase	in	47.5							
F	Turning Radius	in	56.6							
G	Grade Clearance	%	27							
H	Overall Width	in	36							
J	Fork Length	in	30, 36, 42 & 48							
	Maximum Battery Size***	in	13.12 x 31.75 x 23.25 High							
	Minimum Battery Weight	lb	975							
	Right Angle Stacking Aisle Width		Head Length (D) + Load Length + 8" Clearance							

Model 30 WB*			30WBTL Limited Free Lift				30WBTF Full Free Lift				30WBTT 3 Stage Mast
A	Lifting Height	in	106	130	154	178	106	130	154	178	152
	Capacity at 24" Load Center	lb	3000	3000	3000	2700	3000	3000	3000	2700	3000
	Free Lift	in	12	12	12	12	23	35	47	59	23
B	Collapsed Height	in	71	83	95	107	71	83	95	107	71
C	Extended Height**	in	154.5	178.5	202.5	226.5	154.5	178.5	202.5	226.5	200.5
	Net Weight Less Battery	lb	4271	4384	4497	4610	4291	4402	4513	4624	4787
D	Head Length	in	70								
E	Wheelbase	in	52.5								
F	Turning Radius	in	61.6								
G	Grade Clearance	%	26								
H	Overall Width	in	37								
J	Fork Length	in	30, 36, 42 & 48								
	Maximum Battery Size***	in	13.12 x 31.75 x 23.25 High								
	Minimum Battery Weight	lb	975								
	Right Angle Stacking Aisle Width		Head Length (D) + Load Length + 8" Clearance								

Model 40 WB*			40WBTL Limited Free Lift				40WBTF Full Free Lift				40WBTT 3 Stage Mast
A	Lifting Height	in	106	130	154	178	106	130	154	178	152
	Capacity at 24" Load Center	lb	4000	4000	4000	3650	4000	4000	4000	3650	4000
	Free Lift	in	11.25	11.25	11.25	11.25	22.5	34.5	46.5	58.5	22.5
B	Collapsed Height	in	71	83	95	107	71	83	95	107	71
C	Extended Height**	in	155.5	179.5	203.5	227.5	155.5	179.5	203.5	227.5	201.5
	Net Weight Less Battery	lb	4596	4709	4822	4935	4701	4824	4947	5070	5121
D	Head Length	in	77.5								
E	Wheelbase	in	59.5								
F	Turning Radius	in	68.6								
G	Grade Clearance	%	26								
H	Overall Width	in	39								
J	Fork Length	in	30, 36, 42 & 48								
	Maximum Battery Size***	in	13.12 x 31.75 x 23.25 High								
	Minimum Battery Weight	lb	975								
	Right Angle Stacking Aisle Width		Head Length (D) + Load Length + 8" Clearance								

* Optional masts, attachments, longer load dimensions, and higher lifting heights may result in derating of the capacity. Contact local dealer.

**Includes 48" high load backrest.

*** Up to 600 amp hour capacity.



You can count on Crown to build lift trucks designed for safe operation, but that's only part of the safety equation. Crown encourages safe operating practices through ongoing operator training, safety-focused supervision, maintenance and a safe working environment. Go to crown.com and view our safety section to learn more.

Crown Equipment Corporation
New Bremen, Ohio 45869 USA
Tel 419-629-2311
Fax 419-629-3796
crown.com

Because Crown is continually improving its products, specifications are subject to change without notice.

Crown, the Crown logo and the Momentum symbol are trademarks of Crown Equipment Corporation.

Copyright 2012 Crown Equipment Corporation
SF18792 01/12
Printed in U.S.A.